

DELTA[®]

HIGH PERFORMANCE AIR & MOISTURE BARRIERS

DÖRKEN

DELTA[®]-STRATUS SA

Vapor Permeable, Self-adhering Water-resistive
Barrier & Air Barrier with High UV Resistance.




High Performance Air & Moisture Barrier for Extended Exposure.

Fully Adhered:

DELTA®-STRATUS SA

The high performance solution for energy efficient wall systems and longer construction cycles.

Only air and water-resistive barrier in the industry with a UV-resistant coating.

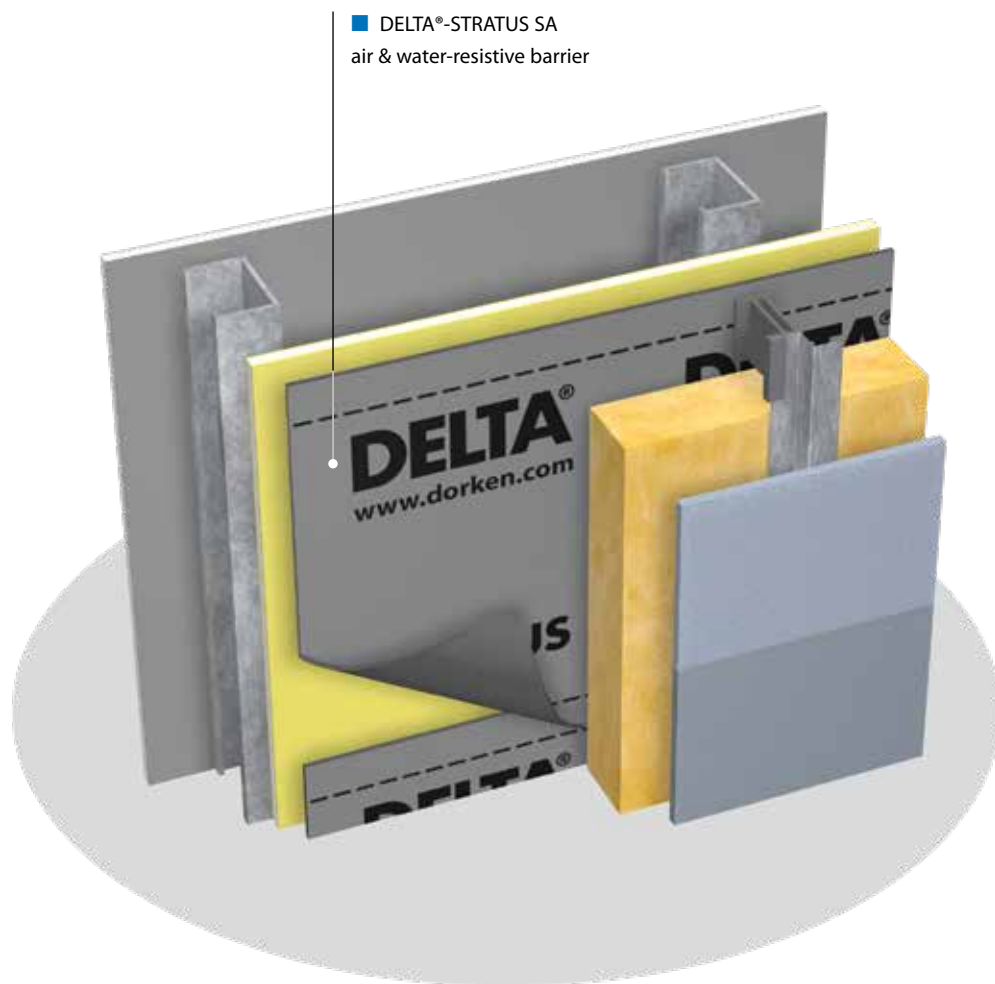




- Aggressively self-adhesive.
- Highly vapor permeable (50 perms).
- Specifically engineered for longer construction cycles.
- UV/weather exposure up to 180 days in climate zones 3-8 or up to 150 days in climate zones 1-2.

- Meets the requirements of IBC 2015 & NBC 2015.
- Improves energy efficiency.
- Enhances drying ability of building enclosure.
- Helps to ensure a healthy and comfortable interior climate.

- Easy to install.
- Matte gray color reduces irritating glare during installation.
- NFPA 285 compliant assemblies (contact Technical Department for details).

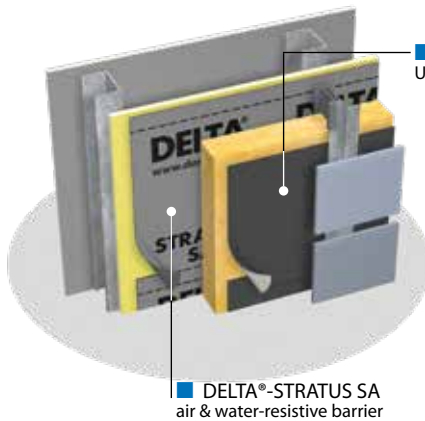

■ DELTA®-FASSADE S
UV resistant water-resistive barrier

■ DELTA®-STRATUS SA
air & water-resistive barrier



Technical Data Overview:

Color	gray
Vapor permeance	31 perms [grains/h/ft ² /in Hg] ASTM E96-05, Proc. A 50 perms [grains/h/ft ² /in Hg] ASTM E96-05, Proc. B
Water vapor transmission	214 g/m ² /24 h ASTM E96-05, Proc. A 343 g/m ² /24 h ASTM E96-05, Proc. B
Tensile strength	MD 107 lbf ASTM D5034 XD 100 lbf
Elongation at break	MD 38 % ASTM D5034 XD 60 %
Water penetration resistance	No Leakage AATCC 127-1985
Air permeance	< 0.02 l/(s x m ²) @ 75 Pa ASTM E2178
Flame spread	10 ASTM E84-18 NFPA Class A; IBC Class A
Smoke developed	90 ASTM E84-18 NFPA Class A; IBC Class A
Temperature range	-40 °F to +176 °F (-40 °C to +80 °C)
Roll length	115' (35 m)
Roll width	4'11" (1.5 m), 19.5" (50 cm), 9.75 (25 cm)

See Technical Data Sheet for further information.

DELTA®-Accessories for DELTA®-STRATUS SA.

Dörken makes your life easier – systematically.



DELTA®-MULTI BAND
pure acrylic adhesive tape used at overlaps of DELTA® air & water-resistant barriers.



DELTA®-FLASHING
used to seal openings for windows and doors to complete the DELTA® air & WRB system.



DELTA®-FLEXX-BAND
stretchable butyl rubber tape used at penetrations.



DELTA®-FAS CORNER
preformed to make corners in window and door openings air and water tight.



DELTA®-TILAXX
high-performance adhesive and sealant specifically designed for use with all DELTA® air-, vapor-, and water-resistant barriers.



DELTA®-LFS
is 100 % silicone ideally suited as both sealant for penetrations/overlaps and liquid flashing for windows and doors. It is compatible with all DELTA® air-, vapor-, and water-resistant barriers.



DELTA®-HF PRIMER
is a solvent-free primer for most construction substrates.

DELTA®



DELTA® is a registered trademark of Ewald Dörken AG, Herdecke, Germany.

12/07/21v4



Dörken Systems Inc.
4655 Delta Way
Beamsville,
ON L0R 1B4, Canada
Tel.: +1 (905) 563 3255
Fax: +1 (905) 563 5582
info@dorken.com
www.dorken.com

A DÖRKENGROUP company

■ The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary. All rights reserved. DELTA®-branded quality products manufactured by Dörken.

■ Visit us on:



LinkedIn



Twitter



YouTube



Pinterest

air barrier
abaa
association of
america

