



PLAN VIEW

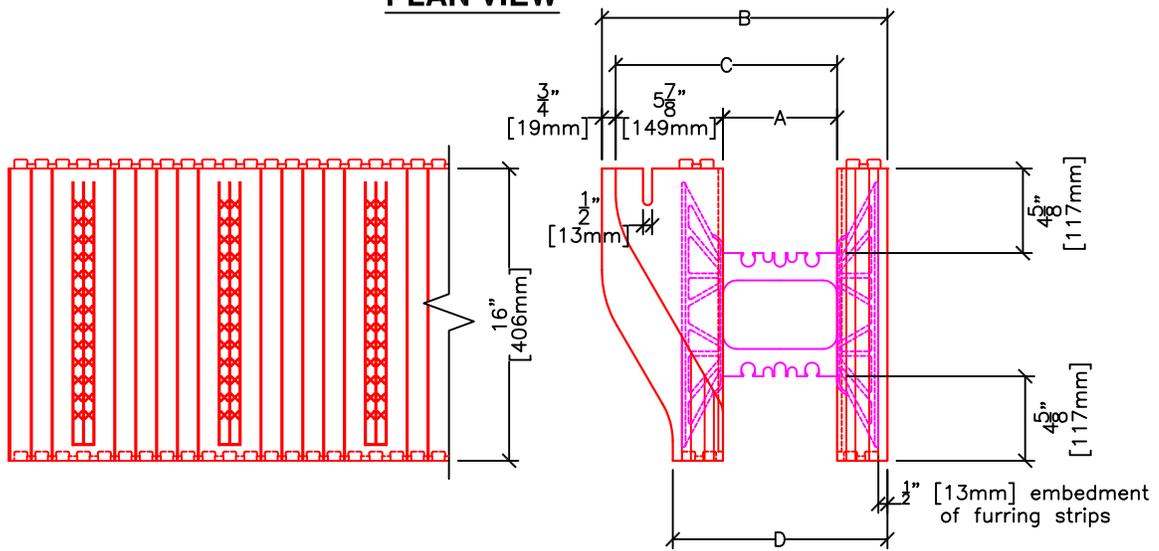

SIDE ELEVATION

END VIEW

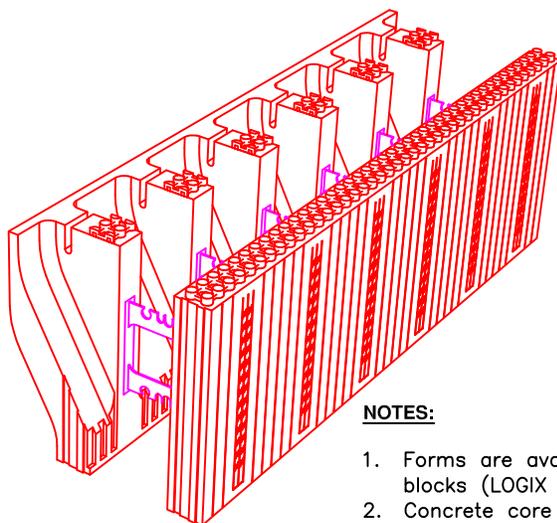

NOTES:

1. Forms are available as assembled (LOGIX PRO) or unassembled (or knock-down) form blocks (LOGIX KD. See 5.1.18).
2. Concrete core thickness wider than 12" (305mm) are available using LOGIX Xtenders (See 5.1.22).
3. 6 1/4" [159mm] LOGIX Brick Ledge Form shown.

FORM SIZES

	4" (102mm)	6.25" (159mm)	8" (203mm)	10" (254mm)	12" (305mm)
A	4" (102mm)	6.25" (159mm)	8" (203mm)	10" (254mm)	12" (305mm)
B	13.325" (340mm)	15.625" (397mm)	17.375" (441mm)	19.375" (492mm)	21.375" (543mm)
C	9.875" (251mm)	12.125" (308mm)	13.875" (352mm)	15.875" (403mm)	17.875" (454mm)
D	9.5" (241mm)	11.75" (298mm)	13.5" (343mm)	15.5" (394mm)	17.5" (445mm)